


Technical Data Sheet

Atelier24 Strong 956

Needle-punched fibre web

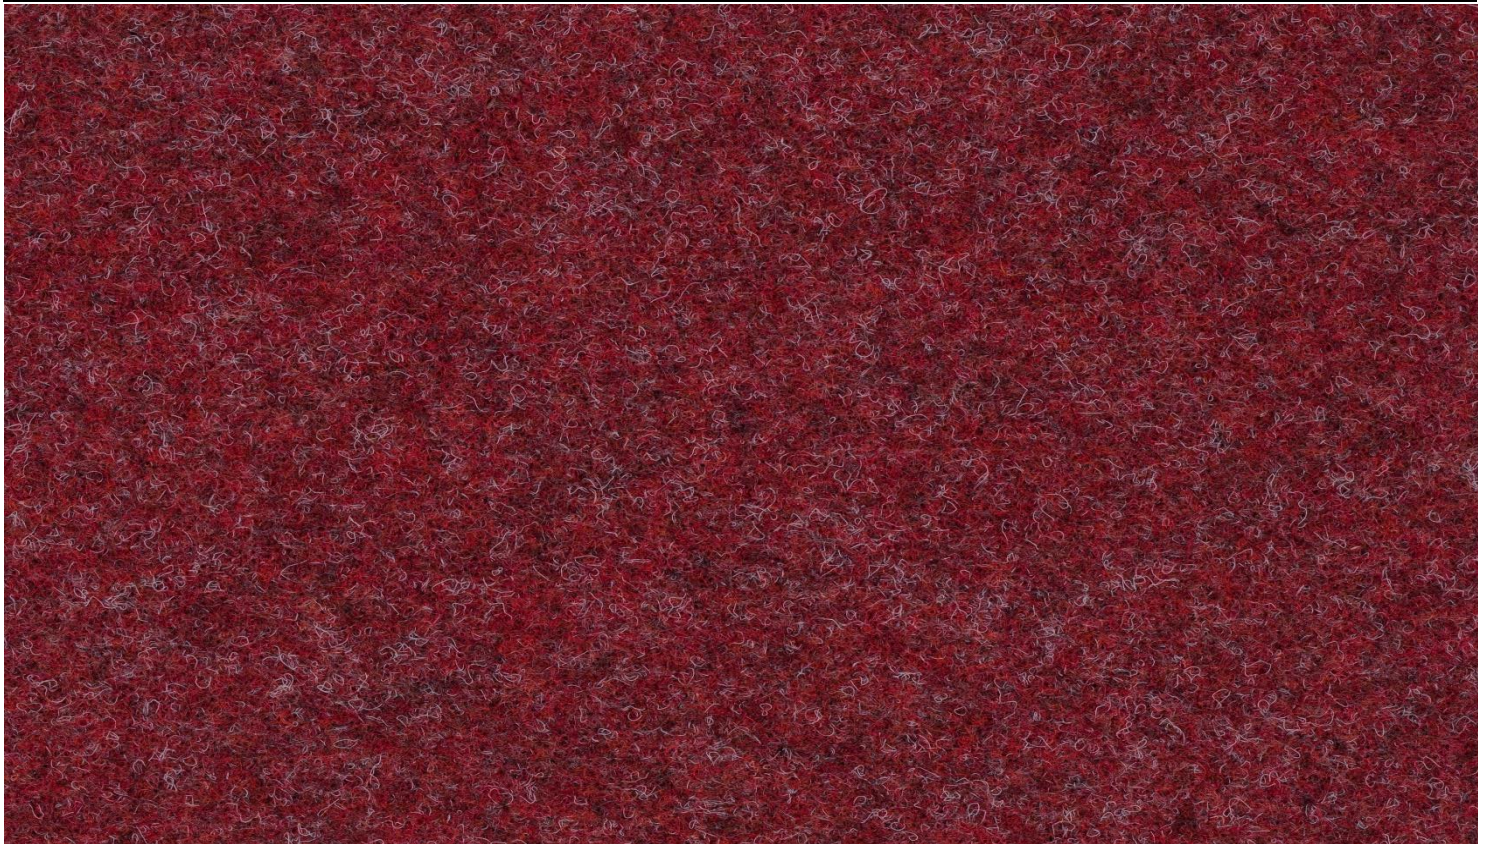

Article number(s):	021 024 037 044 054 056 063 066
	085 088 089 112 115 119 120 130
	131 136 138 141 142 153 163 165
	166 170 174 175 177 180 181 190

Pictograms / Quality seal / Certificates



DoP number: TEPSTRO956

05 | 2021

Information subject to technical modification and error. All previous data sheets are superseded by this issue.

W. & L. Jordan GmbH | Horst-Dieter-Jordan-Straße 7-10 | D-34134 Kassel | info@joka.de | www.joka.de
 INKU Jordan GmbH & Co. KG | IZ-NÖ Süd | Straße 3 | A-2355 Wiener Neudorf | info@inku.at | www.inku.at



Technical Data Sheet

Atelier24 Strong 956

Material / structure

Type of production	Needle-punched fibre web
Wear layer	100 % polyamide
Backing design	Latex full bath
Wear layer charge weight (g/m ²) approx.	750
Total weight (g/m ²) approx.	1.350
Total height (mm) approx.	6,5
Dimensions (cm) approx.	200
Repeat (L x W in cm)	Repeat free

Product characteristics

Hard-wearing value	33 high - commercial
Comfort value	LC1 - simple
Improvement in impact sound (dB) approx.	22
Degree of sound absorption (α_w)	0.20
Lightfastness	≥ 5
Suitable for dissipative laying	yes
Resistance to earth (Ω)	≤ 1 x 10 ⁸
Thermal resistance (m ² xK/W) approx.	0,12
Fire behaviour	B _{fl} -s1
Anti-static	yes
Slip resistance	DS
Suitable for chair castors	yes

Tolerances

Deviation in height	Nominal value + 15 %, - 10 %
Deviation in length	Nominal length ± 1.0 %
Deviation in width	Nominal width ± 1.0 %
Deviation in number of tufts	Nominal value + 10 %, - 7.5%
Deviation in pile weight	Mean value + 13 %, - 10 %
Deviation in total weight	Nominal value ± 15 %

Dimensions and tolerance values in accordance with the standards DIN EN 14159 and EN 1307. Dimensional characteristics and permitted dimensional deviations, which have been determined in the factory, have been given in accordance with the standard.